



MANUFACTURERS OF QUALITY BUILDING COMPONENTS

2024 PRODUCT CATALOG

**BUILD IT  
STRONG**

[sales@hixwood.com](mailto:sales@hixwood.com) // 715-644-0765 // [www.hixwood.com](http://www.hixwood.com)





***ELEVATES***  
**YOUR SELL RATIO**

### **Shortest Lead Times**

Place your orders with us 1-3 days before delivery. We'll make sure it gets done for you!

---

### **Jobsite Delivery**

We can take care of the delivery for you with our piggyback forklifts—All we need is your jobsite address and phone number!

---

### **All About the Details**

Contractors and dealers appreciate the attention to detail we put into all our orders. In the rare case of an oversight or mistake, we get it fixed—Count on it!

---

### **Professional Track Record**

With over 2 decades of customer service, we are dedicated to hard work to get the job done

**GALVANIZED VS GALVALUME.....4**

Coating Type .....	4
Coating Thickness .....	4
Paint Type .....	4
Layers of Protection.....	5
Steel Thickness .....	5

**EXTERIOR PANELS .....7**

Snap-Lock Panel .....	8
Residential Rib 6" Panel .....	10
SUPER-RIB 9" Panel .....	12
Commercial PBR 12" Panel.....	13

**POST FRAME TRIM.....14****INTERIOR PANELS.....19**

Hixwood Liner Panel.....	20
Aluminum Panels .....	21
PVC Interlocking Liner Panel.....	22
Corrugated PVC Liner Panel.....	24
Corrugated Polycarbonate Skylight and Sidelight Panels.....	25

**COLOR CHOICES.....26**

Smooth Colors .....	26
Textured Colors .....	27
Specialty Finishes .....	27

**CONDENSATION CONTROL .....28****SKYLIGHTS.....29****WINDOWS .....30**

Double-Hung Window .....	30
Single-Hung Window.....	30
Sliding Window .....	31
Casement & Awning Window .....	31

**DOORS .....32**

Plyco Series 20 Insulated Door.....	32
Plyco Series 99E Utility Door.....	32
Plyco Series 95 Utility Door .....	33
Plyco 92 Series Door .....	33
Door Track and Trolleys .....	34

**SCREWS.....36**

Metal-to-Wood.....	36
Metal-to-Metal .....	36
Steel Cap #12.....	36
Maze Nails and Big Timber Screws .....	36
Stainless Steel Hardened 410.....	37
Steel Cap #14.....	37
Low Profile.....	37
Pancake.....	37

**SEALANTS .....38**

Emseal.....	38
Butyl Tape.....	38
Caulk.....	38

**RIDGE VENTILATORS .....39**

3 1/2" Ridge Vents .....	39
10' Ridge Ventilators .....	39

**PIPE FLASHING.....40**

Regular Pipe Flashing.....	40
Hi-Temp Pipe Flashing .....	40
RetroFit™ .....	40
Extreme Angle.....	41

**CLOSURES .....42**

Foam Closures .....	42
RE2.....	42
Vented Closures.....	43
Flex-o-Vent.....	43
Uni-Vent.....	43

**SNOW.....44**

Snow Defender™ 4500 .....	44
Snow Defender™ 1500 .....	44
Snow Defender™ 85RF.....	44
AceClamp® Color Snap® Snow Retention....	45
Hixwood Snow Bar .....	45

**NAILS & SOFFIT .....46**

Trim Nails .....	46
Aluminum Soffit.....	46

**ACCESSORIES.....47**

Touch-Up Paint .....	47
Cupolas .....	48
Weathervanes.....	48

# GALVANIZED GALVALUME

VS

## COATING TYPE

A substrate coating is the layer of protection applied to steel to prevent corrosion. Two of the most popular types of substrate coatings are Galvanized (G) and Galvalume


### Galvanized

- 100% Pure Zinc
- Best for livestock buildings
- Track record of longevity



### Galvalume

- 55% Aluminum, 43.5% Zinc, 1.5% Silicone
- Great for residential and commercial buildings
- 20 Year rust-through warranty (non-livestock)

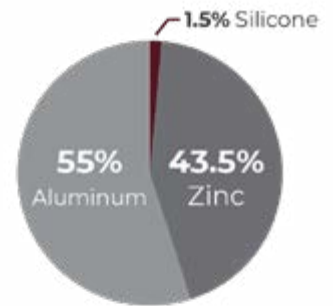

## COATING THICKNESS

The heavier the substrate coatings, the more years of protection you can expect.

### Interior

- Recommended for interior linear panels
- Lighter galvanic protection against corrosion



### Exterior


- Recommended for exterior sidewalls & roofing applications
- Heavier galvanic coating offers better corrosion protection



## PAINT TYPE

Compare the HDPE to PVDF on all the Florida test data and you will quickly see why we choose Beckers Beckry®Tech System over all other paint systems currently

Best fade resistance compared to cost puts you at a distinct advantage.

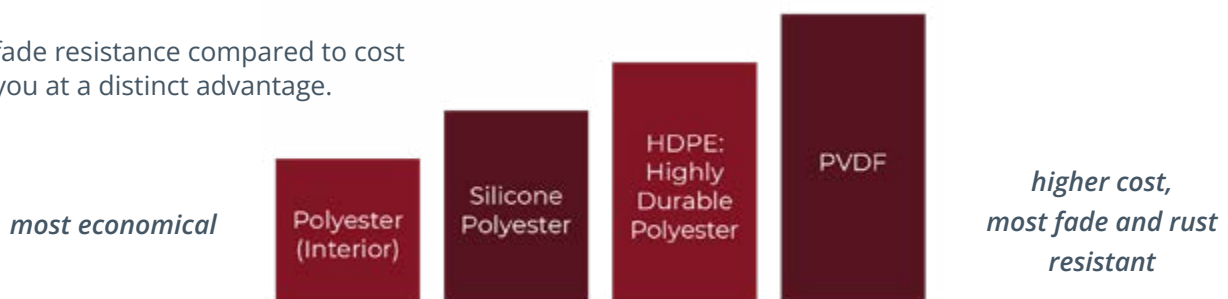

## LAYERS OF PROTECTION

**Bare Metal:** Hixwood Metal Super 100 Coil uses only 28-gauge, .0157– 80,000 P.S.I. bare steel, assuring you of the heaviest, strongest coil available.

**Galvanization (2 Layers):** Hixwood Metal Super 100 Coil is coated with 10 oz. of zinc protection (minimum). Compare with competitors' G-60 and AZ50 products, translates into up to 60% better corrosion resistance.

**Zinc Phosphate Pre-Treatment:** This process preps the surface for painting while adding another layer of corrosion protection. The 1421 Henkel pre-treat allows our paint to adhere better than a lesser pre-treatment.

**Sealer Coat:** Seals the zinc pre-treatment in preparation for the HDPE paint system.

**Thicker Primer Coat:** Preps the surface for consistent paint application and adds yet another layer of corrosion protection.

**Backer Coat:** Full off-white backer coat for a consistent appearance on building interiors.

**Top Coat:** HDPE (Highly Durable Polyester). Superior formulation compared to SMP (Siliconized Modified Polyester). Best color retention on the polyester market today!

**Superior UV Resistance:** Compared to SMP. Extensive testing on South Florida test fence with impressive results.


**Excellent Flexibility:** Equates to better formability, whether bending trims or roll-forming panels, with less cracking or microfracturing.

**Improved Hardness:** Assuring a panel that is more resistant to scratching, marring, and abrasion when handling.



## STEEL THICKNESS

Compare our panels to the competition! We offer a wider range of thicknesses and heavier coatings for a superior line-up!

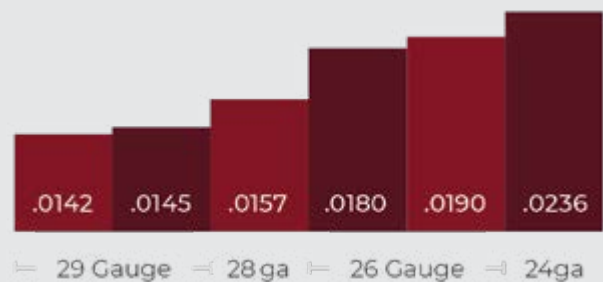

# METAL ROOFING

Environmentally Friendly // Sustainable Product





# EXTERIOR PANELS


## Hixwood Rib Panels start with U.S. Steel Quality.

Our full, hard, steel coil is then coated with the Beckry®Tech Paint System in a color of your choice. This Energy Star Rated paint is designed to reflect the sun's energy and create a cooler, more energy efficient building envelope. The following Hixwood Panels come with a 40 year limited warranty:

- Snap-Lock Panel
- Residential Rib 6" Panel
- Super-Rib 9" Panel
- Commercial PBR 12" Panel



*BeckryTech* Highly Durable Polyester by Beckers® offers a 40-year limited warranty and are ideal for a variety of residential, agricultural, industrial and commercial metal building applications.

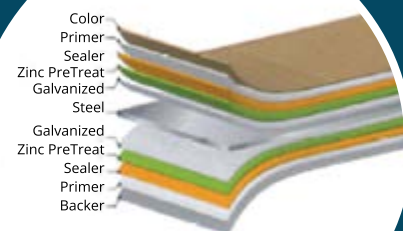



## SNAP-LOCK PANEL

It's weather-tight, durable, long lasting, and requires minimal maintenance.

Description	Rib	Profile	Thickness	Gauge
SL24	1"	16"	.0236"	24 ga
SL26	1"	16"	.0180"	26 ga


### Features & Benefits

The low profile seam makes the panel an excellent option for light commercial and residential applications. This panel snaps in place, so clips are not required.

- Roofs
- Residential
- Light Commercial


 available in all colors

### Panel Profile

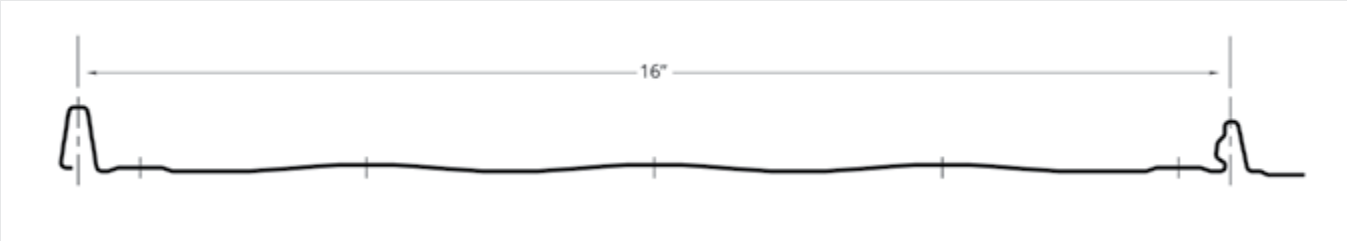


## Snap-Lock Panel Trim Options


These trim options are specific to the Snap-Lock Panel.



Snap Lock Hip Ridge




Snap Lock Rake Trim




Snap Lock Ridge to be used with Vented J




Snap Lock V-Valley




Snap Lock Vented J for Ridge System




Snap Lock W-Valley




Snap Lock End Wall Flashing



Drip Edge



Snap Lock Side Wall Flashing



Hem Trim/Under Sill



# RESIDENTIAL RIB 6" PANEL

This panel can be used for commercial and residential applications, as an accent or to clad entire exteriors.


Description	Rib	Profile	Thickness	Gauge
RES90	1/2"	6"	.0180"	26 ga
RES100	1/2"	6"	.0157"	28 ga
RES60	1/2"	6"	.0150"	29 ga

## Features & Benefits


This panel creates crisp lines and subtle shadows that can compliment many residential applications.

It's lower profile makes it the perfect alternative to our standard 9" profile.

Versatility is built in, as this panel also conforms very well to the curvature on Quonset type/arched roof profiles.


 available in all colors

## Panel Profile

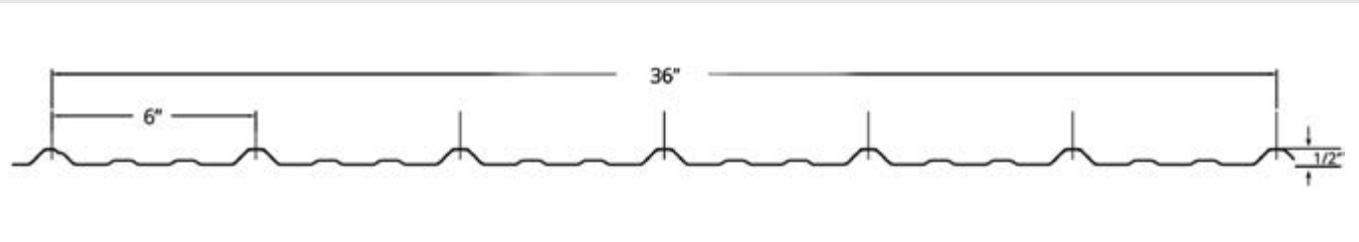

## Residential Rib 6" Panel Trim Options


These trim options are specific to the Residential Rib 6" Panel.

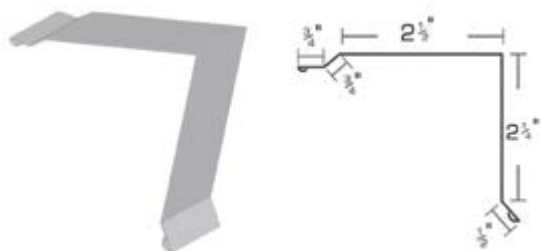


4" Residential Rake




36" W-Valley

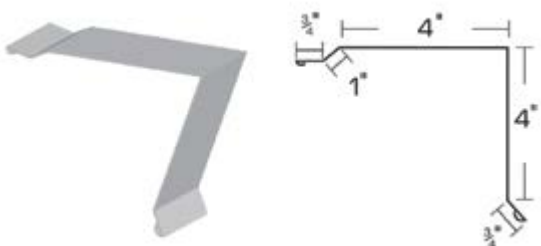


5 1/2" Residential Rake

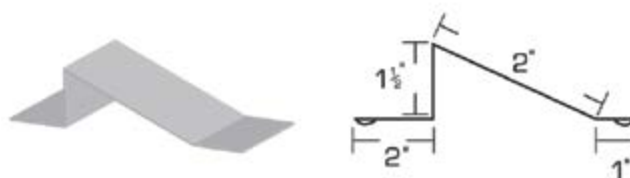

Snowbar

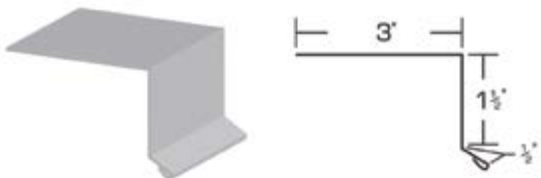

Gutter Apron

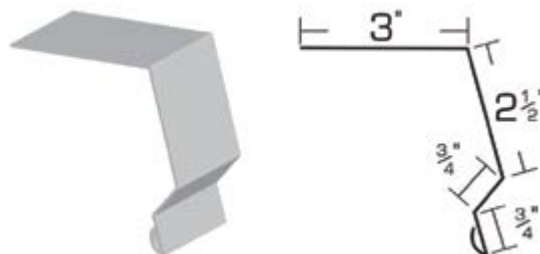

3" x 4" Eave Trim



24" W-Valley





## SUPER-RIB 9" PANEL

The Super-Rib exposed fastener metal wall panel is our strongest panel, allowing for longer spans and a reduction in the number of supports.

Description	Rib	Profile	Thickness	Gauge
SR90	3/4"	9"	.0180"	26 ga
SR100	3/4"	9"	.0157"	28 ga
SR60	3/4"	9"	.0150"	29 ga


### Features & Benefits

- Extremely versatile panels can be used as exterior or interior walls
- May be used with a variety of insulated or non-insulated back-up systems in a wide range of designs and colors
- Ribs can be run either horizontally or vertically

 available in all colors



### Panel Profile Options

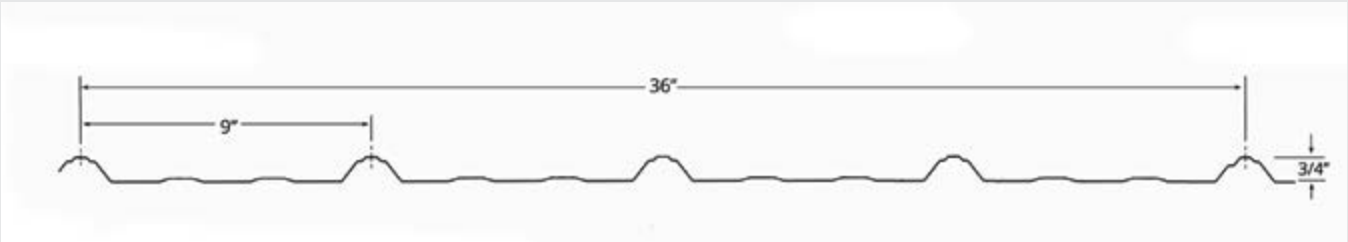



# COMMERCIAL PBR 12\"/>

This panel is a great product for all your commercial projects and large span freestall barns.

Description	Rib	Profile	Thickness	Gauge
PBR-G90	1.25"	12"	.0236"	24 ga
PBR-AZ50	1.25"	12"	.0236"	24 ga
PBR-G90	1.25"	12"	.018"	26 ga
PBR-AZ50	1.25"	12"	.018"	26 ga

## Features & Benefits

This panel creates deep shadows and bold visual lines in either horizontal and vertical installations.

- Can be used in reverse to achieve a completely different aesthetic
- Easy install panel system
- Dieformed ridge cap available


## Custom Trim Options

Contact us to learn about custom trim options.

 available in all colors




## Panel Profile

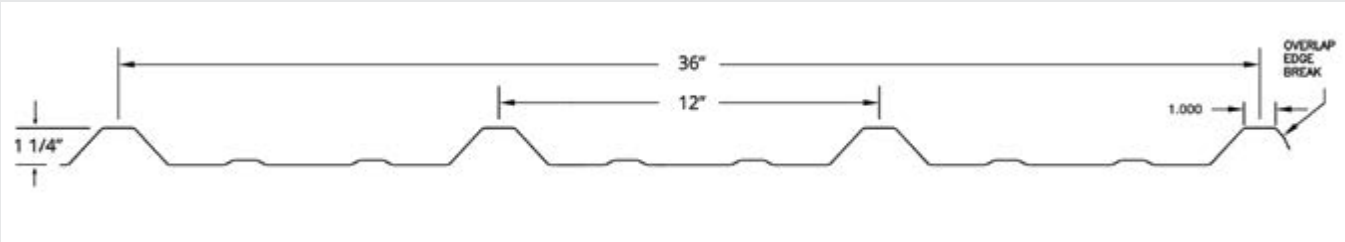


# POST FRAME TRIM

Our post frame trim options are available for the following products:


- Snap-Lock Panels
- Residential Rib 6" Panels
- Super Rib 9" Panels
- Hixwood Liner Panels
- Aluminum Panels
- PVC Panels




Ratguard




J-Channel




1" Bottom Starter




1/2" J-Channel




L2 Bar



Overhead door trim





Drip Cap




Door Jamb Trim

We have strict protocols for perfectly formed trim.  
**Unique profiles are our specialty!**


 available in all colors




Overhead Door Trim with Drip Cap




5 1/2" Corner




Track Cover




18" Ridge



Double Track Cover



12" Universal Ridge




4" Corner



1 1/2" x 7 1/2" Fascia




3 x 5 1/2" Eave Trim




1 1/2" x 5 1/2" Fascia




1 1/2" x 3 1/2" Fascia




End Wall Flashing



1/2" F&J Channel




4x4 Hip Trim




3/4" F&J Channel




4x4 Kick Out Trim



5 1/2" Inside Corner



F Channel



Side Wall Flashing

# TRIM PLACEMENT

Unique Profiles are our Specialty // Precision-Made Trim







# INTERIOR PANELS

---

Our interior panels are well suited for a broad range of agricultural, commercial, and industrial applications including. Choose from a variety of materials to suit your project:

- Hixwood Liner Panels (Steel)
- Aluminum Panels
- PVC Panels



# HIXWOOD LINER PANEL

Finish off your garage or post frame with our steel liners featuring custom cut lengths, easy installation and is a strong, durable option to finish your interior.


Description	Rib	Profile	Gauge
Super-Rib	3/4"	9"	29 ga
Residential-Rib	1/2"	6"	29 ga
PBR 12"	1 1/4"	12"	26 ga

## Features & Benefits


- Stronger and more durable than drywall
- 3x lighter than drywall
- available in brite white




## Super-Rib Panel Profile

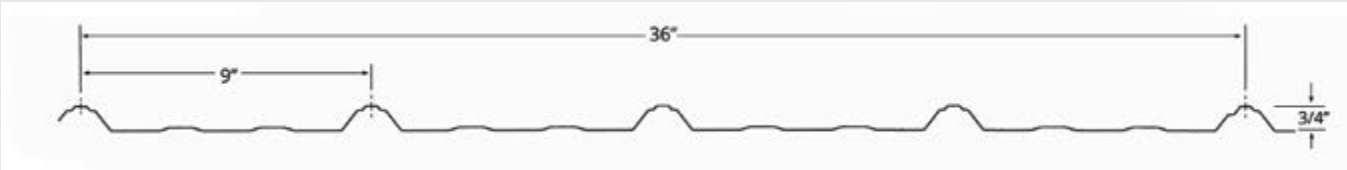

## Residential Rib 6" Panel Profile

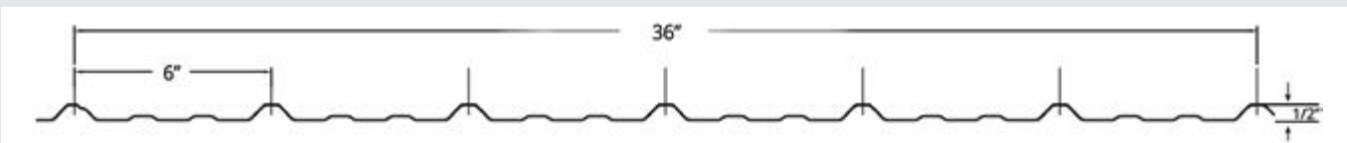

## PBR 12" Panel Profile

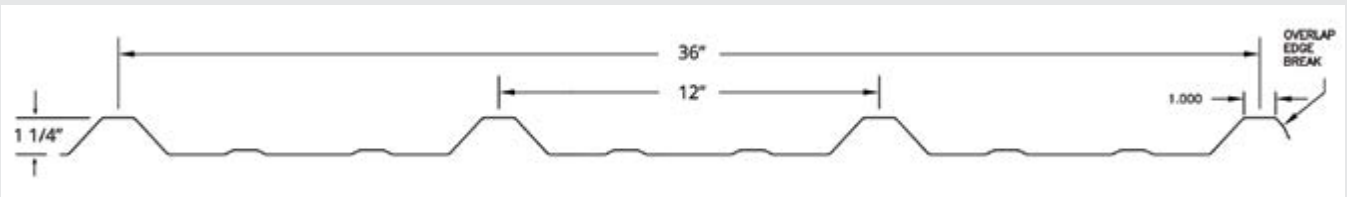



# ALUMINUM PANELS


Superior longevity compared to standard linear panel.

Description	Rib	Profile	Thickness
Super-Rib	3/4"	9"	.017"
Residential-Rib	1/2"	6"	.017"


## Features & Benefits

These aluminum panels create a clean environment for poultry, hog, and freestall operations. The embossed feature keeps the aluminum panel from waving or rippling, also enhances light distribution for nighttime operations.


- available in brite white
- available in mill finish diamond embossed




## Super-Rib Panel Profile

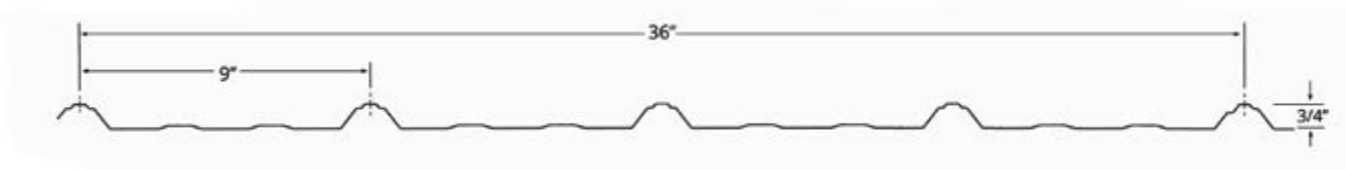

## Residential Rib 6" Panel Profile

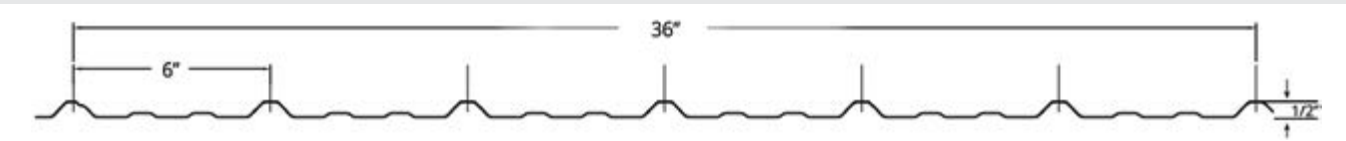

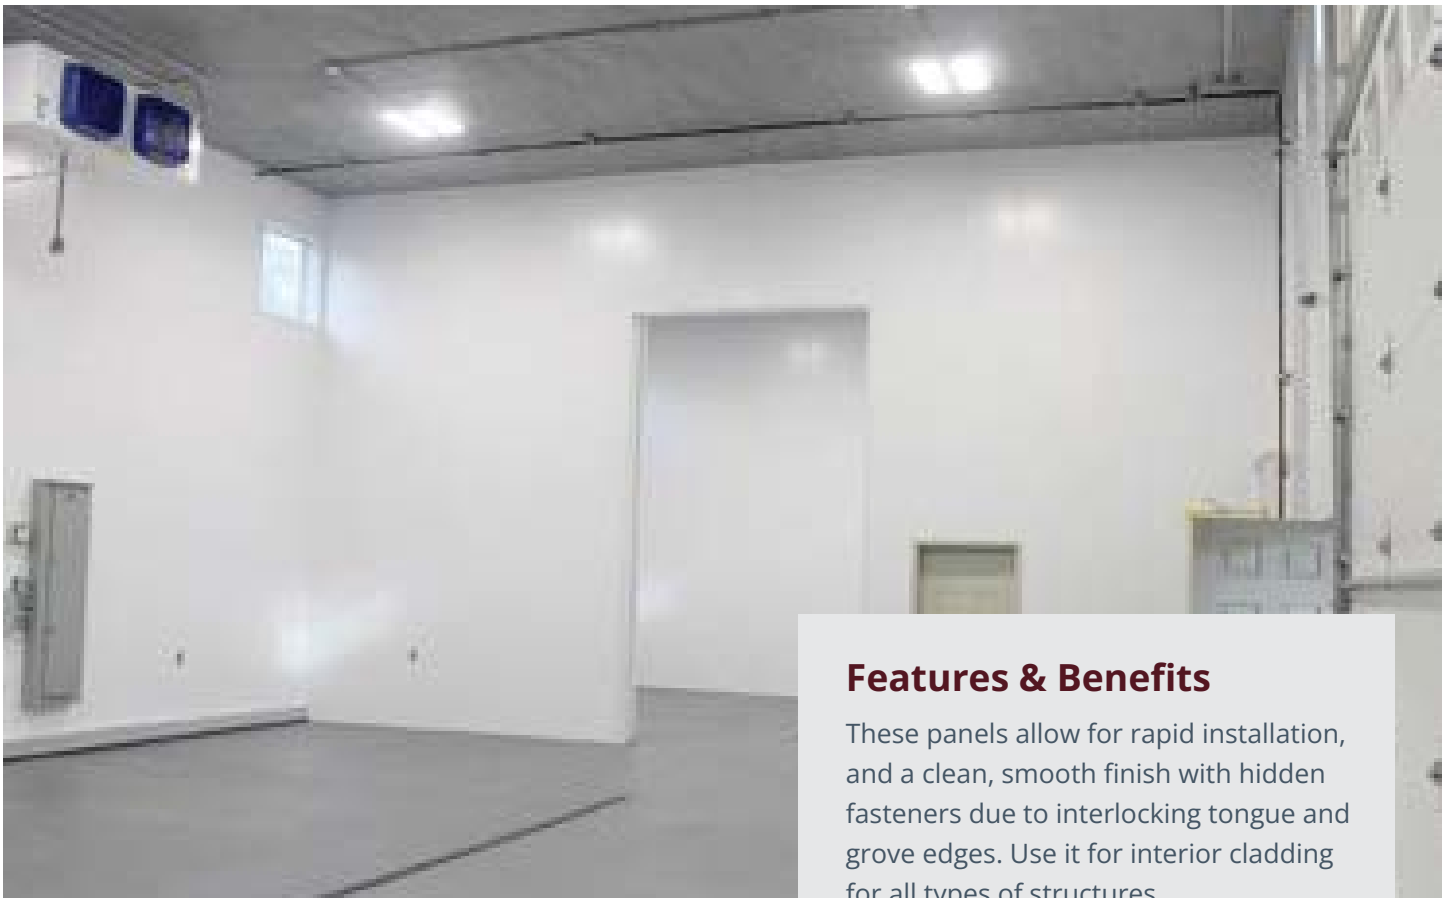

## Features & Benefits

These panels allow for rapid installation, and a clean, smooth finish with hidden fasteners due to interlocking tongue and groove edges. Use it for interior cladding for all types of structures.

- Thickness: 1/2"
- Class A fire rating
- Warrantied for 20 years
- Waterproof, rust-proof
- Excellent chemical resistance
- Easy to clean/sanitize smooth surface
- Non-flammable

○ available in brite white

## PVC INTERLOCKING LINER PANEL

These smooth, interlocking wall and ceiling liner panels with a multiwall structure resulting in a high level of rigidity and strength.



Surface is smooth, clean-looking and easy to maintain.


Tongue-&-Groove sides interlock for simple, rapid installation.

Fasteners are concealed for a clean look.


Heavy duty flange with slotted fastener holes allow for expansion & contraction.

## PVC Interlocking Liner Panel Trim Options

These trim options are specific to the Duraclad Interlocking Liner Panels.

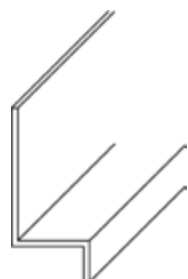


Base Trim

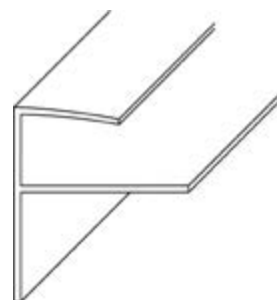


Profile




H-Divider



Inside Corner



J-Trim



Outside Corner



# CORRUGATED PVC LINER PANEL

From hog barns to dairy sheds, from poultry houses to fertilizer storage facilities and more, Ag-Tuf and Ag-Tuf UV hold up where other products won't.




Description	Rib	Profile	Thickness
Ag-Tuf Panel	3/4"	9"	.035"

## Features & Benefits

Ag-Tuf corrugated PVC liner panel provides efficient cladding for a wide variety of structures.


- resistant to chemicals allowing for frequent cleaning and sanitary maintenance
- extremely easy to install and maintain using ordinary tools
- preserves attractive glossy appearance over a long period of time

☐ available in white high gloss

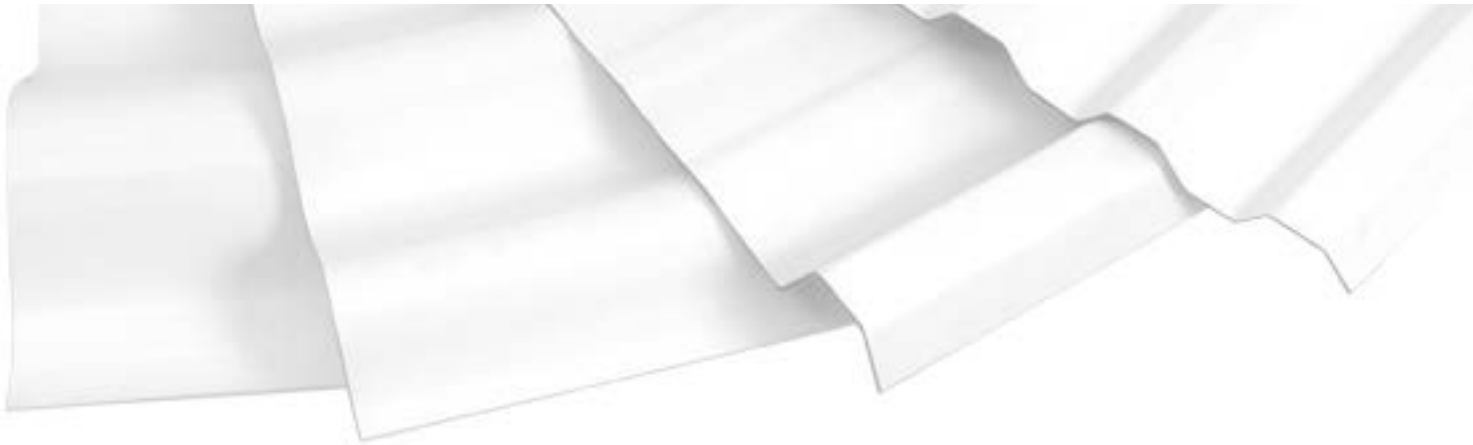

## Corrugated PVC Liner Panel Trim Options


These trim options are specific to the Ag-Tuf Corrugated Liner Panels.

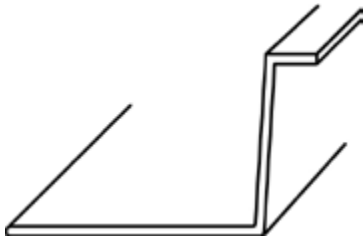

Base Trim



Inner Corner

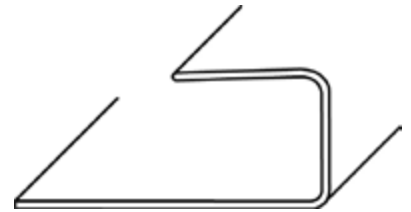

J-Channel

## CORRUGATED POLYCARBONATE SKYLIGHT AND SIDELIGHT PANELS

SunSky corrugated polycarbonate panels stand up to punishing exterior applications and offer multiple advantages over traditional fiberglass corrugated panels.

SunSky provides up to 20 times greater impact resistance, warranted protection against yellowing, excellent load ratings, and the highest resistance to wind uplift—outstanding properties confirmed by independent laboratory tests and in installations worldwide since 1984. SunSky is available in soft white for maximum light transmission without glare, as well as clear and a range of colors to filter light or reduce heat loads.

- Impact resistant and virtually unbreakable
- Transparent: up to 90% light transmission
- Weather and UV resistant
- Wide service temperature range
- Blocks 99.9% of harmful UV radiation
- Lightweight – less than half the weight of glass
- Self-extinguishing
- Easy to work with and install using standard tools
- Will not yellow like FRP



# COLOR CHOICES



**CAUTION:** *These colors are not an exact match. Please refer to metal samples or official samples before ordering.*

## SMOOTH COLORS

These colors feature a low gloss and offer superior scratch resistances.



Light Stone




Cobblestone




Bone White




White




Rawhide




Clay



Buckskin




Patina Green




Light Gray




Ash Gray




Charcoal




Rural Red



Brick Red




Crimson




Burgundy




Evergreen




Slate Blue



Gallery Blue




Burnished Slate




Earth Brown




Dark Brown



Copper



Black



Forest Green

### Our Smooth and Textured Color Palette Is Available In:

G-90	Galvanized	22ga	24ga	26ga	
G-100	Galvanized	28ga			
G-60	Galvanized	29ga			
AZ50	Galvalume	22ga	24ga	26ga	29ga



## TEXTURED COLORS

These colors are available in a textured option that add great appeal to any project. They feature a low gloss and offer superior scratch resistances and a user friendly application. It's a great way to enhance your residence, shop, church roof, or man cave!



## SPECIALTY FINISHES

These colors are ideal for roofing or siding and offer texture and a color options with depth and warmth.



# CONDENSATION CONTROL

## CONDENSTOP

These panels can hold more than one quart of water per ten square feet of space! Can be applied to all 9" steel panels.

### Areas of Use

- Post Frame and Agricultural Buildings
- Self-Storage Buildings
- Workshops and Garages
- Insulated Buildings with ceilings

### Advantages

- It can cut installation time in half.
- Arrives at the jobsite on the steel—saving you time.
- Protects the steel, by reducing contact with corrosive fumes.

### How it Works

When climate conditions cause condensation to occur, this product absorbs and holds that moisture in specially designed pockets in the membrane. When conditions return to above dew point, the moisture is released back into the air as normal humidity.



# SKYLIGHTS

## SKYLIGHTS

We stock three different colors: Soft White, Solar Gray, and Clear

### Product Features

- Corrugated polycarbonate is virtually unbreakable
- High transmission of natural daylight
- Hail and wind resistant (FBC approved)
- Blocks 100% of harmful UV radiation
- Resistant to yellowing
- 10 Year Warranty

### Available Sizes

- 8'
- 10'
- 12'
- 14'
- 16'



## SUNSKY RIDGE CAP

10' Clear Ridge Cap

### Product Features

- 10 Year Warranty
- Withstands extreme climates (-40°F to 212°F)
- Hail and wind resistant
- No yellowing
- 100% UV protection



# WINDOWS

Silver Line products by Anderson are rigorously tested to deliver years of smooth, reliable operation. They are constructed with heavy duty, low maintenance vinyl that has color consistent throughout, making scratches virtually invisible and eliminating the need for painting.




- ENERGY STAR qualified with the appropriate energy efficient options.
- Limited lifetime warranty ensures your windows will perform for as long as you own your home.

## DOUBLE-HUNG WINDOW

The Silver Line 3000 Series double-hung window has two vertically sliding sash in a single frame. This window is available in a vast selection of styles and sizes, making it an ideal choice for almost any home.

### Features & Benefits:

- Colonial brickmold design adds a touch of classic style
- Tilt-in top and bottom sash offer easy cleaning from the inside
- Specially designed balance system makes this window effortless to open
- Integral "J" channel allows for neat, easy trimming of exterior siding to the window.
- Optional flat casing recreates the look of traditional wood casing

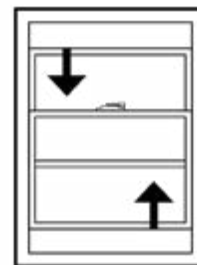


## SINGLE-HUNG WINDOW

The Silver Line 2900 Series single-hung window pairs an elegant exterior appearance with sturdy construction. It combines the classic look of colonial molding with an energy efficient design to keep out the elements.

### Features & Benefits:

- Colonial brickmold design adds a touch of classic style to your home
- Tilt-in bottom sash for easier cleaning
- Specially designed balance system makes this window effortless to open
- Integral "J" channel allows for neat, easy trimming of exterior siding to the window.

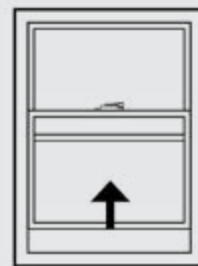


## SLIDING WINDOW

The Silver Line 2800 Series sliding window offers exceptional flexibility with a variety of options while the sturdy construction and energy efficient design provide reliable, energy saving performance.

### Features & Benefits:

- Colonial brickmold design adds a touch of classic style to your home
- Durable rollers and a smooth rolling track make opening these windows easy
- Integral “J” channel allows for neat, easy trimming of exterior siding to the window.
- Available in 2- or 3-panel configurations to fit any space options.

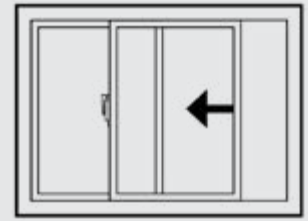


## CASEMENT & AWNING WINDOW

Silver Line 70 Series casement and awning windows offer a balance of style and convenience with energy efficiency. With many configurations to choose from, these windows deliver design flexibility to complement virtually any home.

### Features & Benefits:

- A wide, flat profile with a curved detail creates an upscale design
- Optional colonial brickmold design adds a touch of classic style to your home
- Opens effortlessly for effective ventilation
- Multi-point locking system offers security and easy use
- Folding operator handle eliminates interference with shades and blinds
- Optional integral “J” channel allows for neat, easy trimming of exterior siding to the window.

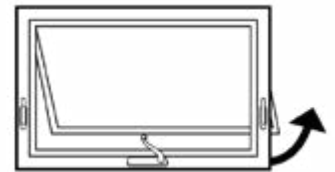

# DOORS

## PLYCO SERIES 20 INSULATED DOOR

The Plyco 20 Series pre-hung door with universal swing feature is the one door that's right for the job - the whole job.

### Features & Benefits:

- full rolled edge 24-gauge steel panel, 1-3/4" thick
- universal swing feature, and is fully reversible in the 3-12" thick jamb
- 16 ga jamb and panel are galvanized steel
- Stainless steel hinges are standard
- quality double contact weather stripping on jamb allows for greater leak protection
- jamb is tooled for hinge and strike mortise, and all jamb mounting holes are counter sunk to allow smooth surface installation
- composite lock block and deadbolt prep are standard
- lock strike plate is adjustable
- handicap threshold is optional
- passes all ISDI ANSI code tests;

Standard sizes are 2668, 2828, 3068, 3668, 3070 and 3670; also available are 4068 & 4070 with 24-gauge steel panels



## PLYCO SERIES 99E UTILITY DOOR

The Plyco 99 series pre-hung door is one of our most popular doors.

### Features & Benefits:

- Universal swing feature, fully reversible in the 3-1/2" thick jamb
- Polyurethane foam core to reduce sound with superior insulating qualities (13 R-factor)
- Variety of locksets (optional)
- Special back-set extrusion assures added strength for mounted hinge
- Full perimeter weather stripping. Special sweep available for use with in-swinging applications
- Optional all-white painted frame improves appearance
- New rolled edge construction; No wood used inside; Patented closer blocking



## PLYCO SERIES 95 UTILITY DOOR

Universal swing feature, and is fully reversible in the 3-1/2" thick jamb, Polyurethane foam core reduces sound and possesses superior insulating qualities—R-13, three 4x4 butt hinges per door—prevents wracking and assures smooth positive operation,

### Features & Benefits:

- heavy duty 16-gauge steel frame
- full perimeter weather stripping
- variety of locks, hardware and windows available (optional)



## PLYCO 92 SERIES DOOR

### Special order this door in any of our Smooth or Textured Colors.

This heavy-duty door has a full thermal break and is pre-hung with 2 way swing capability. Low-E glass is recommended when adding a lite kit, this will ensure premium energy efficiency.

- 16-gauge steel jamb and a 24 gauge insulated steel panel
- Three heavy duty stainless steel, fixed pin hinges are included.
- Handicap approved threshold and a header are included



# DOOR TRACK AND TROLLEYS

Stock only one track to fit all applications.



**BC1-Bracket**  
interior and no cover applications



**BC3-Bracket**  
for face mount with cover applications



**PB127s-Chain Snugger**  
Used to secure wood or metal split doors



**BC-65S Door Stop**  
Door stop with stiffener ribs for added strength. For doors up to 2 1/4"



**PB97S Stay Roller**  
Used to hold a sliding door against the wall.  
Adjustable for 1 3/4" to 3 3/4" doors.  
2" diameter wheel



splice collar brackets, end-caps, and trolleys are universal and can be used with other slotted round track systems.



**PB121 door latch w/7" hook**  
Cam action jamb latch used to hold the door against the jamb.




**R29S Celcon® Wood Door Trolley (Side Mount)**  
for wood frame doors 1 3/4" - 2 3/8" thick



**PB25T9 Celcon® 9" Bolt Through Trolley**  
For wood/metal frame doors up to 600 pounds

## Two distinct 1-1/2" profiles for wood/metal and all metal framed slide doors.

- Color Matched - Over 27 powder coat colors for exact match to most roll formers metal siding.
- Job Packed No minimum order to buy—job pack all of your color coordinated doors at one low price
- Availability - Quick lead time, 4-7 business days in weekly route truck delivery zones.

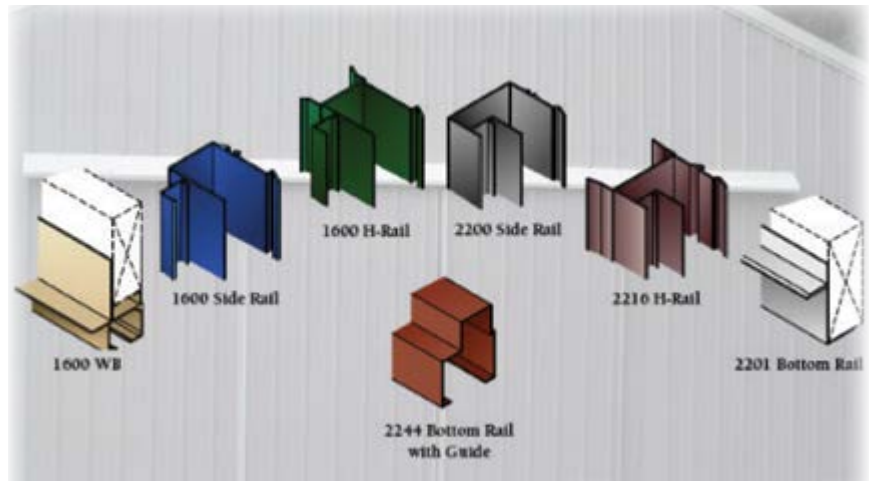

### 1600 Series

1-1/2" System



1600 Slide Rail



1600 H-Rail



1600 WB

### 2200 Series

1-1/2" System



2200 Slide Rail



2216 H-Rail



2216 Bottom



2244 Bottom


### Guides



**TRG BOTTOM GUIDE**  
Guide system used with 1600 WB bottom rail only.  
Stock sizes are 6', 8', 10'



**TBSG BOTTOM GUIDE**  
Guide system used with 2244 bottom rail only.  
Stock sizes are 6', 8', 10'



**STEEL HORIZONTAL / BOX GIRTS**  
1-1/2"x3-1/2" BoxGirts add strength to slide doors 6' to 20' sizes in stock ready to ship.



# SCREWS

## METAL-TO-WOOD

**PLY-LO DRILLER** features an innovative new design drill point.

This patented design will speed penetration and reduce metal shavings and dust. The PLY-LO DRILLER matches the specifications of the PLY-LO family of fasteners with the addition of the PLY-LO DRILL POINT making it a fast drilling fastener with superior pull out performance for all metal to wood construction



Length	Description	Size
1"	Metal-to-Wood	#10
1 1/2"	Metal-to-Wood	#10
2"	Metal-to-Wood	#10
2 1/2"	Metal-to-Wood	#10
3"	Metal-to-Wood	#10



## METAL-TO-METAL

**Metalfast SD** fastener is a self-drilling fastener developed for metal to metal construction applications.

Fasten steel sheet to steel frame. The Metalfast SD engineered drill point allows for faster penetration of the steel panel.



Length	Description	Size
7/8"	Lap Metal Screws	#14
3/4"	Lap Metal Screws	#12/14
1"	Metal-to-Metal	#12/14
1 1/4"	Metal-to-Metal	#12/14
1 1/2"	Metal-to-Metal	#12/14
2"	Metal-to-Metal	#12/14
3"	Metal-to-Metal	#14



## STEEL CAP #12

**PLY-LO #12 EXTREME** fastener is used in extreme environments, large buildings and as replacements.

It includes the long life coating in a fastener designed to secure metal panels in place and prevent separation.



Length	Description	Size
1"	Brite White	#12
1 1/2"	Brite White	#12
2"	Brite White	#12
2 1/2"	Brite White	#12
3"	Brite White	#12



## MAZE NAILS AND BIG TIMBER SCREWS

We stock a wide variety of both product lines.



## STAINLESS STEEL HARDENED 410

**PLY-LO 410** stainless fasteners, secure roof sheets to wood for a long life. Hi-Lo type 17 cut point - 410 stainless steel with Ultra-seal Corrosion Resistant Coating - 1/2" O.D. 304 Stainless / EPDM Vulcanized Sealing Washer. 1/4" Across flats hex head.

Length	Description	Size
1"	Metal-to-Wood	#10
1 1/2"	Metal-to-Wood	#10
2"	Metal-to-Wood	#10
2 1/2"	Metal-to-Wood	#10
3"	Metal-to-Wood	#10



## STEEL CAP #14

**PLY-LO #14** fastener includes the long life coating in a fastener designed to secure metal panels in place and prevent separation. Application: Used in extreme environments, large buildings and as replacements.

Length	Description	Size	Pcs/Bag
1"	Brite White	#14	250
1 1/2"	Brite White	#14	250
2"	Brite White	#14	250
2 1/2"	Brite White	#14	250
3"	Brite White	#14	250



## LOW PROFILE

**PLY-LO Low Profile** dome head fasteners with a 6 point star drive provides an aesthetic, low profile appearance on sidewall metal applications on post frame buildings.

- Available in 5 colors
- Special Order

Length	Size	Pcs/Bag
1"	#10	250
1 1/2"	#10	250
2"	#10	250



## PANCAKE

This ultra-thin pancake head fastener is designed to fasten flush and lay flat without dimpling or showing through the panel.

- Available in 3 sides with a SP drill point and #2 square
- low profile head style
- fastens to metal and wood
- one square drive bit per box



# SEALANTS

## EMSEAL

Supplied with self adhesive on one side.

After removal of packaging, material begins gradual expansion—more slowly in cold weather than in hot.

- Will not dry out and become hard and brittle
- UV-stable
- Conforms to contours and fills gaps
- Highly resistant to bugs and vermin
- Will not extrude from between joints like caulk or butyl tapes
- Maintains seal during thermal expansion and contraction of building panels



Description	Pcs/Box	LB/Box
1" x 1" x 19.68' roll	26	16.6
1 1/2" x 1" x 13.12' roll	24	16.1

## BUTYL TAPE

Seal is not affected by expansion and contraction of metal

- Superior adhesive strength
- Resistant to UV light
- Withstands extreme roof temperatures



Description	Pcs/Box	Stock
3/32"x3/8"x45' Roll	16	stock item
3/32"x1/2"x45' Roll	16	non-stock

## CAULK

**NovaFlex** features a neutral cure silicone with excellent adhesion.

- Permanently flexible
- Extrudes to -20 degrees F
- Adheres to: Metals, Wood, Masonry, PVC/PVDF, Common Construction Materials
- Also used as: Gutter sealant, Chimney flashing, Snow guard, Pipe Boots
- Made in USA. Professional Grade




# RIDGE VENTILATORS

## 3 1/2" RIDGE VENTS

With Stainless Steel Diverter

### Special Order Products

- RV35
- RV100
- RV25
- RV35F

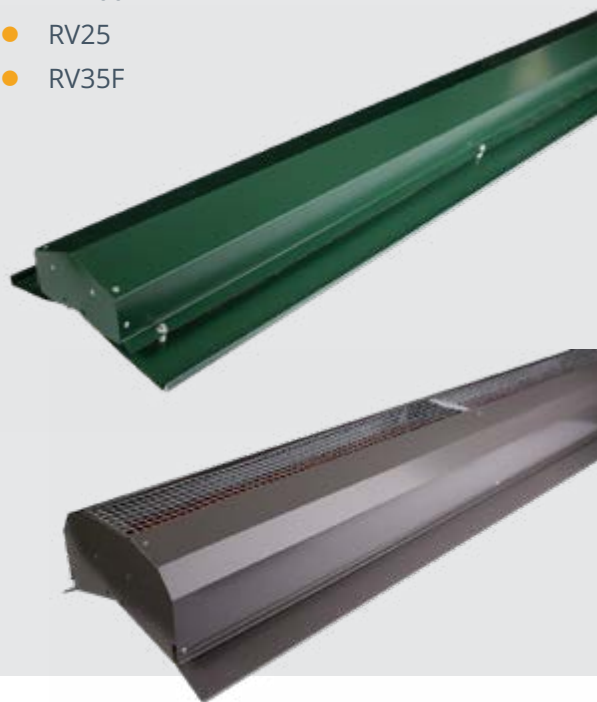


## 10' RIDGE VENTILATORS

With Stainless Steel Diverter

### Special Order Products

- RV900
- RV400

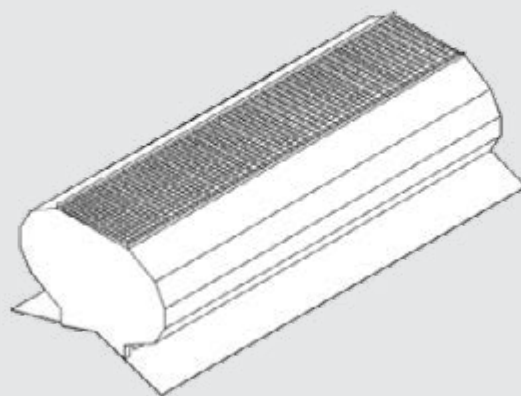

# PIPE FLASHING

## REGULAR PIPE FLASHING

Withstands up to 238° F

### In Stock Sizes

- #1 ¼"
- #2 1 ¾"
- #3 2"
- #4 3"
- #5 4" (Best Seller)
- #6 5" (Best Seller)
- #7 6"
- #8 7"
- #9 10"



## HI-TEMP PIPE FLASHING

Withstands up to 392° F

### In Stock Sizes

- #3 2"
- #4 3"
- #5 4"
- #6 5"
- #7 6"



## RETROFIT™

Withstands up to 238° F

Description	Pcs/Box	LB/Box
#1 ¾" – 2 ¾"	10	4
#1 ¾" – 2 ¾"	5	6
#1 ¾" – 2 ¾"	5	10





## EXTREME ANGLE

Withstands up to 238° F

### Product Features

- Fits a 10/12 roof pitch
- For a pipe 4" or less, the roof pitch range is: 8/12 — 12/12



Description	Pcs/Box	LB/Box
#3 1/4" – 6 1/4"	5	5.52

# CLOSURES

## FOAM CLOSURES

### Product Features

- Dimensions: 36" x 1"
- High-density, blocks air flow
- Exceptional adhesion to building materials
- UV light resistant
- Withstands up to 238 F



<i>Rib</i>	<i>Description</i>	<i>Outside Closure</i>
¾"	Outside Closure	9" Outside Closure with adhesive
¾"	Inside Closure	9" Outside Closure with adhesive
⅝"	Outside Closure	6" Outside Closure with adhesive
⅝"	Inside Closure	6" Outside Closure with adhesive

## RE2

RE2 is used as a reroofing product in place of 1x4 lumber. It is easy to use, it keeps the metal roofing panels separated from existing shingles.

### Product Features

- Dimensions: ¼" x 2 ½" x 150'
- There are two rolls total per box with nails included.

<i>Description</i>	<i>Pcs/Box</i>	<i>Pcs/Pallet</i>
RE2 Retrofit Spacer 150' Roll	2	60



## FLEX-O-VENT

### Product Features

- Pre-applied adhesive
- Ventilates under ridge cap and hips
- 1 Roll per 10' 6" Ridge Cap

<i>Roll Dimensions</i>	<i>Pcs/Box</i>	<i>Pcs/Pallet</i>
1" x 2" x 20'	100	200



## VENTED CLOSURES

### Product Features

- Pre-applied adhesive
- High airflow for good ventilation
- ¾" Rib profile for a tight seal against the weather
- Tough mesh does not wrap up on screws

<i>Description</i>	<i>Length</i>	<i>Outside Closure</i>
LP2 Vented	36" Closure	9" Outside Closure Ribs
LP2 Vented	32" Closure	9" Outside Closure Ribs



## UNI-VENT

### Product Features

- Pre-applied adhesive
- Ventilates under ridge cap and hips
- 1 Roll per 10' 6" Ridge Cap

<i>Roll Dimensions</i>	<i>Pcs/Box</i>	<i>Pcs/Pallet</i>
1" x 1 ½" x 20	135	270



# SNOW

## SNOW DEFENDER™ 4500

The snow guard you need for long lasting protection against melting snow. Designed for use with exposed fastener panels on 2x4 purlins in the flat position. (Not for use with standing seam roofing)

### Features

- Made w/ 16 Gauge Type 304 Stainless Steel
- EPDM Rubber Sealer
- Powder-Coated
- Multiple Colors In Stock
- 50 Pieces per 15 Pound Box
- No Caulk Needed



## SNOW DEFENDER™ 1500

Designed for uses with an exposed fastener panel on 2x4 purlins in the upright position, or on 2x4 purlins in the flat position

### Features

- Made w/ 16 Gauge Type 304 Stainless Steel
- EPDM Rubber Sealer
- Powder-Coated
- Multiple Colors In Stock
- 50 Pieces per 15 Pound Box
- No Caulk Needed



## SNOW DEFENDER™ 85RF

The patent pending Snow Defender™ 85RF is designed for standing seam roofs and is the snow guard of choice for many roofers. It fits standing seams up to 3/8" width and 1" through 1 3/4" seam height.

### Features

- Made w/ Type 304 Stainless Steel
- Powder-Coated
- Does Not Penetrate Through Metal
- Multiple Colors In Stock
- 32 Pieces per Box



# ACECLAMP® COLOR SNAP® SNOW RETENTION

Snow guards that install faster and easier. Features a unique non-penetrating sliding pin clamp. Available in a variety of variants to cover most roofing seams, AceClamp® Snow Guards eliminate the need for set-screws, instead opting for our own unique non-rotating sliding pin clamp.



## Product Features

- 7 1/2 foot length in stock
- Pre-assembled clamps get you on and off the roof faster (no setscrews)
- Patented non-penetrating slidepin design preserves the panel warranty
- Color match your snow retention to your roof


**Call us for immediate delivery!**



## HIXWOOD SNOW BAR

- this snow bar is only intended for exposed fastener roofs
- available in 10' lengths

🌈 available in all colors

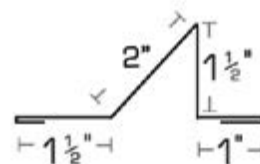

# NAILS & SOFFIT

## TRIM NAILS

Trim nails work great when you have a detailed application like post wraps, header covers, or even fascia boards. You may want this clean appearance on your next project

### Product Features

- Stainless steel
- 1 ¼" ring shank
- Great for detailed trim applications



 available in all colors

## ALUMINUM SOFFIT

We offer steel soffit in two choices, smooth and textured (special order) colors.

### Product Availability

- 16" x 144" Aluminum Soffit Vented **(stock)**
- 16" x 144" Aluminum Soffit Solid **(non-stock)**
- 16" x 12" **(non-stock)**
- 16" x 24" **(non-stock)**



 available in all colors

# ACCESSORIES

## TOUCH-UP PAINT

Touch up spray cans have a detailed even spray, resulting in a smooth finish, unobtainable with a pen or brush. We offer you a choice, for fixing those scratches!

### Product Options

- 4 oz. aerosol
- 1 oz. touch-up pen

 available in all colors



**CAUTION:** *Not recommended for use on large areas. Do not use to paint entire panels or trim. Touch up only!*

## CUPOLAS

We can help you source custom cupolas that flawlessly match your building's functional needs and style.

### Description

- Pre-painted 29ga construction
- Available in over 100 standard colors
- All metal edges are hemmed
- No need to worry about red-rust
- Roof and sides interlock for weathertight connection

### Available Sizes

- 24" x 24"
- 36" x 36"
- 48" x 48"
- 66" x 66"



**Ask us about textured cupolas to match your textured steel!\***

*\*Extra lead time required for textured cupolas.*

## WEATHERVANES

Available in sizes 24" and 36"

### Available Designs

- Horse
- Bass
- Buck
- Cow
- Rooster
- Duck
- Tractor





MANUFACTURERS OF QUALITY BUILDING COMPONENTS

Building Materials is our passion and we take pride in getting your project done right the first time. We don't waste your time and give you exactly what you're looking for.



**Roofs that last a lifetime.**



**Custom Trim that Wows.**



**Recreational Buildings that  
Protect What Matters Most.**



**Commercial Buildings that  
Champion Your Business.**



**WE KNOW**

# METAL

We love the outdoors and value hard work. We started Hixwood to supply the best post frame building materials you can get anywhere. Your building is where passion and purpose intersect.

It should look great, last a lifetime, and be a hasslefree process.

A post frame building is where work gets done and where your passion finds its home. It's where hunting stories are told and where the next generation learns to provide the things that really matter.

Some think it's just a building. We think it's a part of your story.


**Contact [sales@hixwood.com](mailto:sales@hixwood.com) for all your needs!**





## CONVERSIONS

1 square = 33.34 linear feet



=

1 Panel at 33.34 feet long

## How to Figure Screw Quantity

Total linear ft.  
of the same color

x

2.5 screws  
per LF

÷

250 screws  
per bag

=


Total bags



Example: 400 Linear feet x 2.5 = 1,000 Screws ÷ 250 = 4 Bags

## Roof Metal Length Calculation

Roof Pitch	Slope Factor
12/12	1.414
10/12	1.302
8/12	1.202
6/12	1.120
5/12	1.083
4/12	1.054
3/12	1.031
2/12	1.014
1/12	1.0035

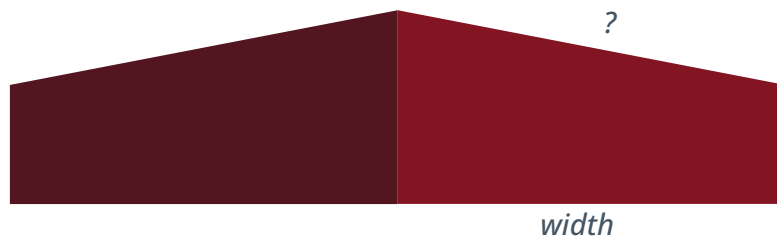

Slope  
Factor

x

Width

= Roof Panel  
Lenth

Example: 1.054 (4/12 pitch) x 20' Width = 21' Roof Panel



**HIXWOOD.COM // 715-644-0765**  
**N14685 Copenhaver Ave, Stanley, WI 54768**